





WDX 69MOTO

500 WATT 6.9" 2-WAY LOUDSPEAKERS

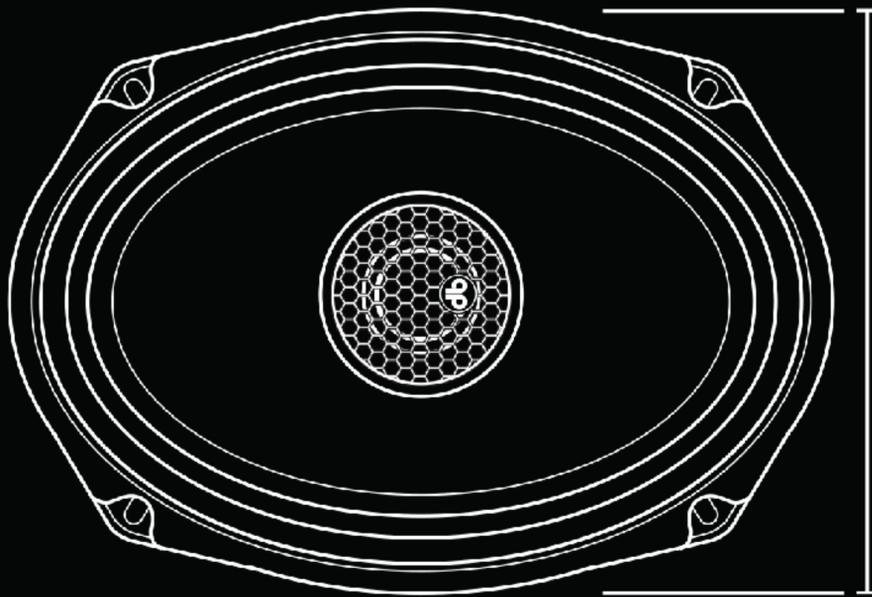

6.02" (153mm)

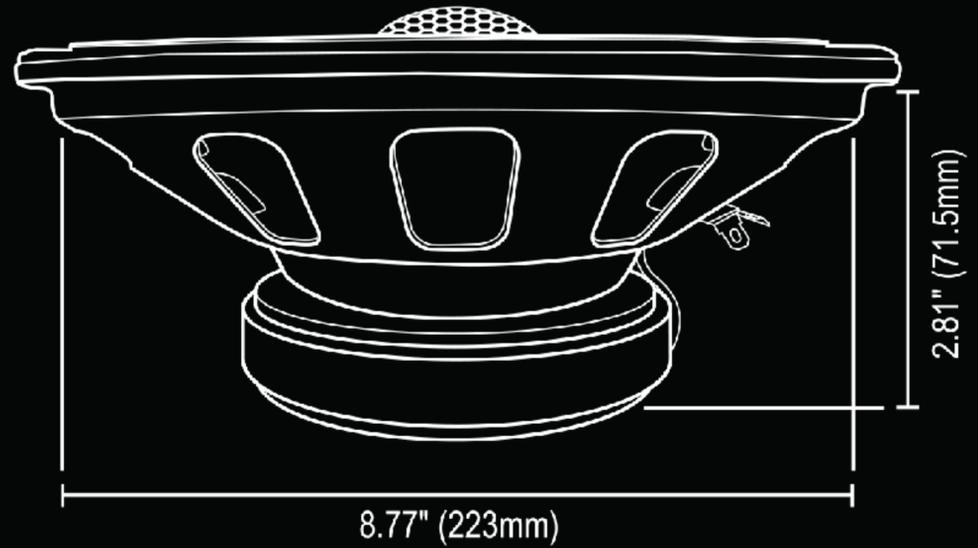

2.81" (71.5mm)

8.77" (223mm)

FEATURES

- 6x9" Weather Resistant Coaxial
- High Efficiency Loudspeaker
- 1.25" Aluminum Dome tweeter with Resonance Chamber
- Ultra Light Weight Treated Cone
- High Reaction Ribbed Treated Surround
- 1.5" High Temperature Voice Coil
- Protective Grills Included

SPECIFICATIONS

- **Power Handling** : 250 Watts
- **Dynamic Wattage** : 500 Watts
- **Music Program** : 100 Watts - 150 Watts
- **Frequency Response** : 70Hz - 21KHz
- **Impedance** : 4Ω
- **Sensitivity** : 103.2dB

DIMENSIONS

- **Mounting Depth** : 2.81" / 71.5mm
- **Cutout Diameter** : 6.02" x 8.77" /
153mm x 223mm

CARACTERISTICAS

- Coaxial de 6" x 9" Resistente al medio ambiente
- Bocina de Alta Eficiencia
- Tweeter de 1.25" con Domo de Aluminio y camara de Resonancia
- Cono Tratado de peso Ultra ligero
- Sorround de Caucho Tratado de alta Reaccion
- Bobina de 1.5" de alta temperatura
- Parrillas de Proteccion Incluidas

ESPECIFICACIONES

- **Potencia** : 250 Watts
- **Potencia Dinámica** : 500 Watts
- **Rango de Potencia** : 100 Watts - 150 Watts
- **Rango de Frecuencia** : 70Hz - 21KHz
- **Impedancia** : 4Ω
- **Sensibilidad** : : 103.2dB

DIMENSIONES

- **Profundidad** : 2.81" / 71.5mm
- **Abertura** : 6.02" x 8.77" /
153mm x 223mm

产品性能

- 6x9寸防水同轴喇叭
- 高性能扬声器
- 1.25寸共振腔体铝高音
- 超轻处理锥盆
- 高顺性悬边
- 1.5寸耐高温音圈
- 保护网罩

产品参数

- 额定功率 : 250 Watts
- 峰值功率 : 500 Watts
- 音乐功率 : 100 Watts - 150 Watts
- 频响范围 (Hz) : 70Hz - 21KHz
- 阻抗 : 4Ω
- 灵敏度 : 103.2dB

安装尺寸

- 安装深度 : 2.81" / 71.5mm
- 开孔直径 : 6.02" x 8.77" /
153mm x 223mm